

ZONDA

V-TYPE SINGLE-ROW
CONDENSER



AIR HEAT EXCHANGER MANUFACTURER



ZONDA

V-TYPE SINGLE-ROW CONDENSER

ZONDA is the V-type condenser allow heat exchange designed for environments where dimensional restraints are important or visibility on the roofs is limited.



ZONDA

V-TYPE SINGLE-ROW CONDENSER

FLUIDS AVAILABLE

SYNTHETIC REFRIGERANTS
CO₂ - GAS COOLER 120 BAR
NH₃ - AMMONIA CONDENSER

62 kW/m²

CAPACITY FOR SPECIFIC FOOT PRINT CONDENSATION DT15 - 900 6P

380

models

From 50 to 80 %

capacity increases at the same
foot print vs table-type

From 20 to 1200 kW

DT 15K Capacity

Up to 1100 kW

with machines 1,2 m high

+ 12 %

increased thickness
high-efficiency rippled tube

+ 20 %

increased thickness
high-efficiency louvered fins



Performance



Performance kW/m² of footprint
at the top of the market.



Three versions:
small, standard, large
for various space requirements.



Adiabatic solution
to increase performances.

Solidity



Increased thicknesses in the coil
without compromising
on material quality.



**Metal structure in pre-painted
plate 15/10**
for excellent solidity.



Connection protected
thanks to header protection panels.



Optimised transport
with machines always sitting side
by side.

ZONDA

V-TYPE SINGLE-ROW CONDENSER




High nozzles
for maximum efficiency.



Solid structure
with casing and heading
protections.



Low noise
To reduce noise levels
we offer two silencer
versions.



**Three possible
configurations**

W 1,2 x L 1,5 x H 1,2

W 1,2 x L 1,5 x H 1,5


W 1,2 x L 1,7 x H 1,2

ACCESSORIES

- EC fan motors
- Two silencers available for fans (D800-D900)
- Corrosion treatment for coil resistant up to 6000 h in salt fog
- Adiabatic solutions: PAD and spray system



EC fan technology
to increase significantly
silence level and energy
saving.



**Versions with
ADIABATIC operation**
with non-organic PAD.



RANGE

Machine length	1,5 ÷ 11,4 m
3 fin spacing	2,1 - 2,4 - 3,6 mm
Fan size	Ø 630 - 800 - 900 - 1000 mm
DT 15K Capacity	23 ÷ 1180 kW
Number of fans	1 ÷ 8

SELECTION CODE

ZONDA	H	63	2	B	2,1	V	AC 04D
ZONDA	V-type single-row condenser						
H	H = direct expansion C = CO ₂ dx A = ammonia						
63	fan size Ø 630 mm						
2	number of fans						
B	A - B - C = coil type						
2,1	fin spacing mm						
V	vertical air flow						
AC	AC = AC motor EC = electronic motor						
04	electric motor poles						
D	S = single phase D = three phase high speed Y = three phase slow speed						

CONFIGURATIONS

RANGE	MODELS	FANS		POLES	AVAILABLE ON REQUEST	
	Nr.	Nr.	Ø mm	Nr.		
ZONDA-S H 63	72	1 ÷ 6	630	4 - 6 - 8 - 12	CO ₂	NH ₃
ZONDA-S H 80	36	1 ÷ 6	800	6 - 8		
ZONDA-L H 80	48	1 ÷ 8	800	6 - 8		
ZONDA H 90	88	1 ÷ 8	900	4 - 6 - 8 - 12		
ZONDA-L H 90	88	1 ÷ 8	900	4 - 6 - 8 - 12		
ZONDA H 100	48	1 ÷ 8	1000	6 - 8		

Configuration on request

CO₂ - gas cooler only up to 6,5 m unit lenght.
NH₃ version only up to 7 m unit lenght.

RANGE	ACCESSORIES																	
	INCREASED FIN SPACING	AISI 304 CASING	SPECIAL RAL	CORROSION C5 CLASS	PREPARED FINS S	COIL CATHODE TREATMENT	VIBRATION DUMPER	EC FANS	WIRING	POWER SWITCHES FOR FANS	SILENCER AX	SILENCER +	FAN SPEED CONTROLLER	DRAINABLE CIRCUIT	GRID COIL PROTECTION	METAL FILTER FOR COIL	ADIABATIC SPRAY SYSTEM	ADIABATIC PAD SYSTEM
ZONDA-S H 63	●	○	○	○	●	●	●	●	●	●	●	○	●	○	○	○	○	○
ZONDA-S H 80	●	○	○	○	●	●	●	●	●	●	●	○	●	○	○	○	○	○
ZONDA-L H 80	●	○	○	○	●	●	●	●	●	●	●	○	●	○	○	○	○	○
ZONDA H 90	●	○	○	○	●	●	●	●	●	●	●	○	●	○	○	○	○	○
ZONDA-L H 90	●	○	○	○	●	●	●	●	●	●	●	○	●	○	○	○	○	○
ZONDA H 100	●	○	○	○	●	●	●	●	●	●	●	○	●	○	○	○	○	○

● Optional

○ On request

ZONDA-S H 63

V-type single-row condenser



Ø 630 mm

FAN SIZE

23 ÷ 440 kW

DT 15K CAPACITY

1 ÷ 6


NUMBER OF FANS



ZONDA-S H 63-1



ZONDA-S H 63-2



ZONDA-S H 63-3



ZONDA-S H 63-4










ZONDA-S H 63-5



ZONDA-S H 63-6

DIMENSIONS

ZONDA-S H 63-1/2/3/4/5/6

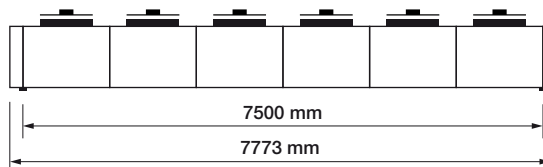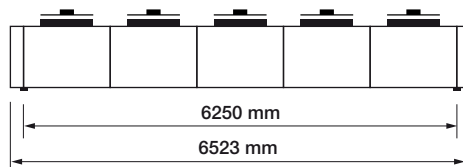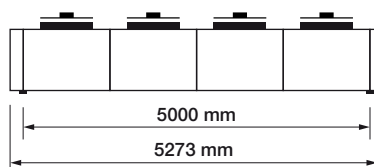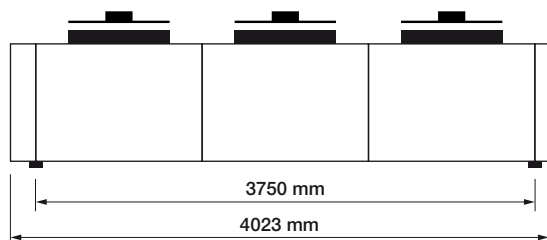

ZONDA-S H 63

V-type single-row condenser



3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-S H 63-1 A 2,1 V AC 04D	58,4	104,7	15550	49	1x1	630	1310	1970	3,4	12,1	142	2x28	2x22
ZONDA-S H 63-1 B 2,1 V AC 04D	69,1	157,1	15200	49	1x1	630	1310	1970	3,4	18,1	159	2x28	2x22
ZONDA-S H 63-1 C 2,1 V AC 04D	72,9	209,5	14850	49	1x1	630	1310	1970	3,4	23,1	176	2x28	2x22
ZONDA-S H 63-2 A 2,1 V AC 04D	116,9	209,5	31100	52	1x2	630	1310	3940	6,8	23,1	251	2x35	2x28
ZONDA-S H 63-2 B 2,1 V AC 04D	137,7	314,2	30400	52	1x2	630	1310	3940	6,8	34,1	284	2x35	2x28
ZONDA-S H 63-2 C 2,1 V AC 04D	146,1	419	29750	52	1x2	630	1310	3940	6,8	45,7	318	2x35	2x28
ZONDA-S H 63-3 A 2,1 V AC 04D	175,6	314,2	46650	54	1x3	630	1310	5910	10,2	34,1	361	2x35	2x28
ZONDA-S H 63-3 B 2,1 V AC 04D	206,4	470,9	45600	54	1x3	630	1310	5910	10,2	51,7	411	2x42	2x35
ZONDA-S H 63-3 C 2,1 V AC 04D	219,3	628,5	44600	54	1x3	630	1310	5910	10,2	68,5	462	2x42	2x35
ZONDA-S H 63-4 A 2,1 V AC 04D	232,2	419	62200	55	1x4	630	1310	7880	13,6	46,5	470	2x42	2x35
ZONDA-S H 63-4 B 2,1 V AC 04D	277,1	628,5	60800	55	1x4	630	1310	7880	13,6	69,9	537	2x54	2x42
ZONDA-S H 63-4 C 2,1 V AC 04D	295,9	837,9	59450	55	1x4	630	1310	7880	13,6	93,8	605	2x54	2x42
ZONDA-S H 63-5 A 2,1 V AC 04D	293,4	523,7	77750	56	1x5	630	1310	9850	17	57,5	580	2x54	2x42
ZONDA-S H 63-5 B 2,1 V AC 04D	346,8	785,6	76000	56	1x5	630	1310	9850	17	84,5	664	2x54	2x42
ZONDA-S H 63-5 C 2,1 V AC 04D	368,5	1047,4	74350	56	1x5	630	1310	9850	17	115,8	749	2x54	2x42
ZONDA-S H 63-6 A 2,1 V AC 04D	351,8	628,5	93300	57	1x6	630	1310	11820	20,4	68,5	688	2x54	2x42
ZONDA-S H 63-6 B 2,1 V AC 04D	413,9	942,7	91200	57	1x6	630	1310	11820	20,4	101,5	790	2x64	2x54
ZONDA-S H 63-6 C 2,1 V AC 04D	439,1	1256,9	89200	57	1x6	630	1310	11820	20,4	137,8	892	2x64	2x54

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-S H 63-1 A 2,1 V AC 06D	42,9	104,7	10100	38	1x1	630	890	600	1,2	12,1	142	2x28	2x22
ZONDA-S H 63-1 B 2,1 V AC 06D	48	157,1	9850	38	1x1	630	890	600	1,2	18,1	159	2x28	2x22
ZONDA-S H 63-1 C 2,1 V AC 06D	49,1	209,5	9650	38	1x1	630	890	600	1,2	23,1	176	2x28	2x22
ZONDA-S H 63-2 A 2,1 V AC 06D	86	209,5	20150	41	1x2	630	890	1200	2,4	23,1	251	2x35	2x28
ZONDA-S H 63-2 B 2,1 V AC 06D	95,9	314,2	19700	41	1x2	630	890	1200	2,4	34,1	284	2x35	2x28
ZONDA-S H 63-2 C 2,1 V AC 06D	98,4	419	19300	41	1x2	630	890	1200	2,4	45,7	318	2x35	2x28
ZONDA-S H 63-3 A 2,1 V AC 06D	129,1	314,2	30250	43	1x3	630	890	1800	3,6	34,1	361	2x35	2x28
ZONDA-S H 63-3 B 2,1 V AC 06D	143,8	470,9	29550	43	1x3	630	890	1800	3,6	51,7	411	2x42	2x35
ZONDA-S H 63-3 C 2,1 V AC 06D	147,7	628,5	28950	43	1x3	630	890	1800	3,6	68,5	462	2x42	2x35
ZONDA-S H 63-4 A 2,1 V AC 06D	170	419	40350	44	1x4	630	890	2400	4,8	46,5	470	2x42	2x35
ZONDA-S H 63-4 B 2,1 V AC 06D	192,2	628,5	39450	44	1x4	630	890	2400	4,8	69,9	537	2x54	2x42
ZONDA-S H 63-4 C 2,1 V AC 06D	198,4	837,9	38550	44	1x4	630	890	2400	4,8	93,8	605	2x54	2x42
ZONDA-S H 63-5 A 2,1 V AC 06D	215	523,7	50400	45	1x5	630	890	3000	6	57,5	580	2x54	2x42
ZONDA-S H 63-5 B 2,1 V AC 06D	240,8	785,6	49300	45	1x5	630	890	3000	6	84,5	664	2x54	2x42
ZONDA-S H 63-5 C 2,1 V AC 06D	247,4	1047,4	48200	45	1x5	630	890	3000	6	115,8	749	2x54	2x42
ZONDA-S H 63-6 A 2,1 V AC 06D	258,5	628,5	60500	46	1x6	630	890	3600	7,2	68,5	688	2x54	2x42
ZONDA-S H 63-6 B 2,1 V AC 06D	288,2	942,7	59150	46	1x6	630	890	3600	7,2	101,5	790	2x64	2x54
ZONDA-S H 63-6 C 2,1 V AC 06D	295,5	1256,9	57850	46	1x6	630	890	3600	7,2	137,8	892	2x64	2x54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA-S H 63



V-type single-row condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-S H 63-1 A 2,1 V AC 08D	30,2	104,7	6300	31	1x1	630	650	235	0,55	12,1	142	2x28	2x22
ZONDA-S H 63-1 B 2,1 V AC 08D	31,7	157,1	6200	31	1x1	630	650	235	0,55	18,1	159	2x28	2x22
ZONDA-S H 63-1 C 2,1 V AC 08D	31,6	209,5	6050	31	1x1	630	650	235	0,55	23,1	176	2x28	2x22
ZONDA-S H 63-2 A 2,1 V AC 08D	60,5	209,5	12600	34	1x2	630	650	470	1,1	23,1	251	2x35	2x28
ZONDA-S H 63-2 B 2,1 V AC 08D	63,3	314,2	12350	34	1x2	630	650	470	1,1	34,1	284	2x35	2x28
ZONDA-S H 63-2 C 2,1 V AC 08D	63,3	419	12150	34	1x2	630	650	470	1,1	45,7	318	2x35	2x28
ZONDA-S H 63-3 A 2,1 V AC 08D	90,8	314,2	18900	36	1x3	630	650	705	1,65	34,1	361	2x35	2x28
ZONDA-S H 63-3 B 2,1 V AC 08D	95	470,9	18550	36	1x3	630	650	705	1,65	51,7	411	2x42	2x35
ZONDA-S H 63-3 C 2,1 V AC 08D	94,9	628,5	18200	36	1x3	630	650	705	1,65	68,5	462	2x42	2x35
ZONDA-S H 63-4 A 2,1 V AC 08D	119,9	419	25200	37	1x4	630	650	940	2,2	46,5	470	2x42	2x35
ZONDA-S H 63-4 B 2,1 V AC 08D	127,1	628,5	24700	37	1x4	630	650	940	2,2	69,9	537	2x54	2x42
ZONDA-S H 63-4 C 2,1 V AC 08D	127,3	837,9	24300	37	1x4	630	650	940	2,2	93,8	605	2x54	2x42
ZONDA-S H 63-5 A 2,1 V AC 08D	151,2	523,7	31500	38	1x5	630	650	1175	2,75	57,5	580	2x54	2x42
ZONDA-S H 63-5 B 2,1 V AC 08D	158,9	785,6	30900	38	1x5	630	650	1175	2,75	84,5	664	2x54	2x42
ZONDA-S H 63-5 C 2,1 V AC 08D	158,8	1047,4	30350	38	1x5	630	650	1175	2,75	115,8	749	2x54	2x42
ZONDA-S H 63-6 A 2,1 V AC 08D	181,8	628,5	37800	39	1x6	630	650	1410	3,3	68,5	688	2x54	2x42
ZONDA-S H 63-6 B 2,1 V AC 08D	190,2	942,7	37100	39	1x6	630	650	1410	3,3	101,5	790	2x64	2x54
ZONDA-S H 63-6 C 2,1 V AC 08D	190	1256,9	36400	39	1x6	630	650	1410	3,3	137,8	892	2x64	2x54

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-S H 63-1 A 2,1 V AC 12D	23,1	104,7	4600	24	1x1	630	420	110	0,27	12,1	142	2x28	2x22
ZONDA-S H 63-1 B 2,1 V AC 12D	23,3	157,1	4450	24	1x1	630	420	110	0,27	18,1	159	2x28	2x22
ZONDA-S H 63-1 C 2,1 V AC 12D	22,8	209,5	4350	24	1x1	630	420	110	0,27	23,1	176	2x28	2x22
ZONDA-S H 63-2 A 2,1 V AC 12D	46,2	209,5	9200	27	1x2	630	420	220	0,54	23,1	251	2x35	2x28
ZONDA-S H 63-2 B 2,1 V AC 12D	46,4	314,2	8900	27	1x2	630	420	220	0,54	34,1	284	2x35	2x28
ZONDA-S H 63-2 C 2,1 V AC 12D	45,6	419	8700	27	1x2	630	420	220	0,54	45,7	318	2x35	2x28
ZONDA-S H 63-3 A 2,1 V AC 12D	69,4	314,2	13800	29	1x3	630	420	330	0,81	34,1	361	2x35	2x28
ZONDA-S H 63-3 B 2,1 V AC 12D	69,6	470,9	13400	29	1x3	630	420	330	0,81	51,7	411	2x42	2x35
ZONDA-S H 63-3 C 2,1 V AC 12D	68,4	628,5	13050	29	1x3	630	420	330	0,81	68,5	462	2x42	2x35
ZONDA-S H 63-4 A 2,1 V AC 12D	91,9	419	18400	30	1x4	630	420	440	1,08	46,5	470	2x42	2x35
ZONDA-S H 63-4 B 2,1 V AC 12D	93,2	628,5	17850	30	1x4	630	420	440	1,08	69,9	537	2x54	2x42
ZONDA-S H 63-4 C 2,1 V AC 12D	91,6	837,9	17400	30	1x4	630	420	440	1,08	93,8	605	2x54	2x42
ZONDA-S H 63-5 A 2,1 V AC 12D	115,6	523,7	23000	31	1x5	630	420	550	1,35	57,5	580	2x54	2x42
ZONDA-S H 63-5 B 2,1 V AC 12D	116,4	785,6	22300	31	1x5	630	420	550	1,35	84,5	664	2x54	2x42
ZONDA-S H 63-5 C 2,1 V AC 12D	114,3	1047,4	21750	31	1x5	630	420	550	1,35	115,8	749	2x54	2x42
ZONDA-S H 63-6 A 2,1 V AC 12D	138,8	628,5	27600	32	1x6	630	420	660	1,62	68,5	688	2x54	2x42
ZONDA-S H 63-6 B 2,1 V AC 12D	139,4	942,7	26750	32	1x6	630	420	660	1,62	101,5	790	2x64	2x54
ZONDA-S H 63-6 C 2,1 V AC 12D	136,9	1256,9	26100	32	1x6	630	420	660	1,62	137,8	892	2x64	2x54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA-S H 80

V-type single-row condenser



Ø 800 mm

FAN SIZE

60 ÷ 530 kW

DT 15K CAPACITY

1 ÷ 6


NUMBER OF FANS



ZONDA-S H 80-1



ZONDA-S H 80-2



ZONDA-S H 80-3



ZONDA-S H 80-4







ZONDA-S H 80-5



ZONDA-S H 80-6

DIMENSIONS

ZONDA-S H 80-1/2/3/4/5/6

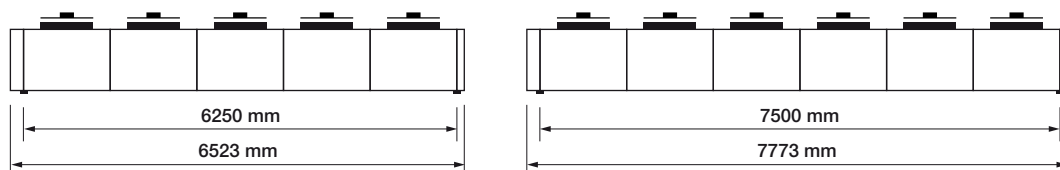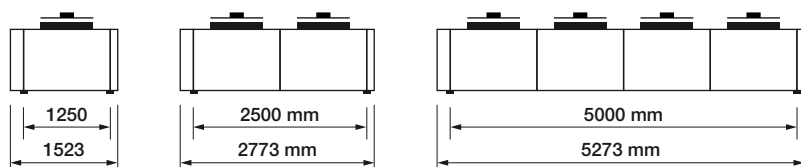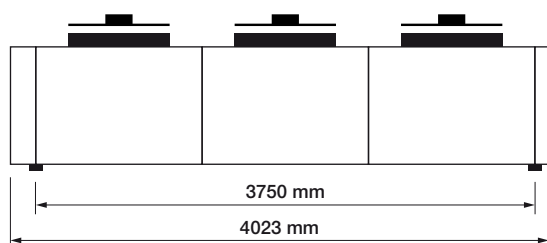

ZONDA-S H 80

V-type single-row condenser



3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-S H 80-1 A 2,1 V AC 06D	70,8	104,7	20300	46	1x1	800	880	1720	3,9	12,1	142	2x28	2x22
ZONDA-S H 80-1 B 2,1 V AC 06D	84,1	157,1	19250	46	1x1	800	880	1720	3,9	18,1	159	2x28	2x22
ZONDA-S H 80-1 C 2,1 V AC 06D	87,9	209,5	18350	46	1x1	800	880	1720	3,9	23,1	176	2x28	2x22
ZONDA-S H 80-2 A 2,1 V AC 06D	141,2	209,5	40550	49	1x2	800	880	3440	7,8	23,1	251	2x35	2x28
ZONDA-S H 80-2 B 2,1 V AC 06D	167,1	314,2	38500	49	1x2	800	880	3440	7,8	34,1	284	2x35	2x28
ZONDA-S H 80-2 C 2,1 V AC 06D	176,4	419	36700	49	1x2	800	880	3440	7,8	45,7	318	2x35	2x28
ZONDA-S H 80-3 A 2,1 V AC 06D	212,3	314,2	60850	51	1x3	800	880	5160	11,7	34,1	361	2x35	2x28
ZONDA-S H 80-3 B 2,1 V AC 06D	250,5	470,9	57750	51	1x3	800	880	5160	11,7	51,7	411	2x42	2x35
ZONDA-S H 80-3 C 2,1 V AC 06D	265	628,5	55100	51	1x3	800	880	5160	11,7	68,5	462	2x42	2x35
ZONDA-S H 80-4 A 2,1 V AC 06D	282,6	419	81150	52	1x4	800	880	6880	15,6	46,5	470	2x42	2x35
ZONDA-S H 80-4 B 2,1 V AC 06D	338,2	628,5	77000	52	1x4	800	880	6880	15,6	69,9	537	2x54	2x42
ZONDA-S H 80-4 C 2,1 V AC 06D	359	837,9	73450	52	1x4	800	880	6880	15,6	93,8	605	2x54	2x42
ZONDA-S H 80-5 A 2,1 V AC 06D	356,3	523,7	101400	53	1x5	800	880	8600	19,5	57,5	580	2x54	2x42
ZONDA-S H 80-5 B 2,1 V AC 06D	422,4	785,6	96250	53	1x5	800	880	8600	19,5	84,5	664	2x54	2x42
ZONDA-S H 80-5 C 2,1 V AC 06D	446,3	1047,4	91800	53	1x5	800	880	8600	19,5	115,8	749	2x54	2x42
ZONDA-S H 80-6 A 2,1 V AC 06D	425,4	628,5	121700	54	1x6	800	880	10320	23,4	68,5	688	2x54	2x42
ZONDA-S H 80-6 B 2,1 V AC 06D	502,8	942,7	115500	54	1x6	800	880	10320	23,4	101,5	790	2x64	2x54
ZONDA-S H 80-6 C 2,1 V AC 06D	530,5	1256,9	110150	54	1x6	800	880	10320	23,4	137,8	892	2x64	2x54

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-S H 80-1 A 2,1 V AC 08D	60	104,7	14700	39	1x1	800	680	770	2,22	12,1	142	2x28	2x22
ZONDA-S H 80-1 B 2,1 V AC 08D	67	157,1	14000	39	1x1	800	680	770	2,22	18,1	159	2x28	2x22
ZONDA-S H 80-1 C 2,1 V AC 08D	67,3	209,5	13400	39	1x1	800	680	770	2,22	23,1	176	2x28	2x22
ZONDA-S H 80-2 A 2,1 V AC 08D	119,8	209,5	29450	42	1x2	800	680	1540	4,44	23,1	251	2x35	2x28
ZONDA-S H 80-2 B 2,1 V AC 08D	133,2	314,2	28000	42	1x2	800	680	1540	4,44	34,1	284	2x35	2x28
ZONDA-S H 80-2 C 2,1 V AC 08D	134,9	419	26750	42	1x2	800	680	1540	4,44	45,7	318	2x35	2x28
ZONDA-S H 80-3 A 2,1 V AC 08D	180	314,2	44150	44	1x3	800	680	2310	6,66	34,1	361	2x35	2x28
ZONDA-S H 80-3 B 2,1 V AC 08D	199,7	470,9	42050	44	1x3	800	680	2310	6,66	51,7	411	2x42	2x35
ZONDA-S H 80-3 C 2,1 V AC 08D	202,5	628,5	40150	44	1x3	800	680	2310	6,66	68,5	462	2x42	2x35
ZONDA-S H 80-4 A 2,1 V AC 08D	239,3	419	58850	45	1x4	800	680	3080	8,88	46,5	470	2x42	2x35
ZONDA-S H 80-4 B 2,1 V AC 08D	269,1	628,5	56050	45	1x4	800	680	3080	8,88	69,9	537	2x54	2x42
ZONDA-S H 80-4 C 2,1 V AC 08D	273,5	837,9	53500	45	1x4	800	680	3080	8,88	93,8	605	2x54	2x42
ZONDA-S H 80-5 A 2,1 V AC 08D	301,6	523,7	73550	46	1x5	800	680	3850	11,1	57,5	580	2x54	2x42
ZONDA-S H 80-5 B 2,1 V AC 08D	336	785,6	70050	46	1x5	800	680	3850	11,1	84,5	664	2x54	2x42
ZONDA-S H 80-5 C 2,1 V AC 08D	340,4	1047,4	66900	46	1x5	800	680	3850	11,1	115,8	749	2x54	2x42
ZONDA-S H 80-6 A 2,1 V AC 08D	360,6	628,5	88300	47	1x6	800	680	4620	13,32	68,5	688	2x54	2x42
ZONDA-S H 80-6 B 2,1 V AC 08D	400,6	942,7	84050	47	1x6	800	680	4620	13,32	101,5	790	2x64	2x54
ZONDA-S H 80-6 C 2,1 V AC 08D	405,4	1256,9	80250	47	1x6	800	680	4620	13,32	137,8	892	2x64	2x54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA-L H 80

V-type single-row condenser



Ø 800 mm

FAN SIZE

66 ÷ 800 kW

DT 15K CAPACITY

1 ÷ 8


NUMBER OF FANS



ZONDA-L H 80-1



ZONDA-L H 80-2



ZONDA-L H 80-3



ZONDA-L H 80-4



ZONDA-L H 80-5



ZONDA-L H 80-6








ZONDA-L H 80-7



ZONDA-L H 80-8

DIMENSIONS

ZONDA-L H 80-1/2/3/4/5/6/7/8

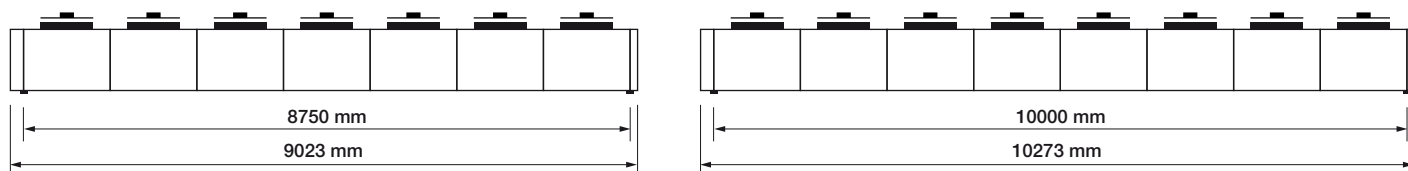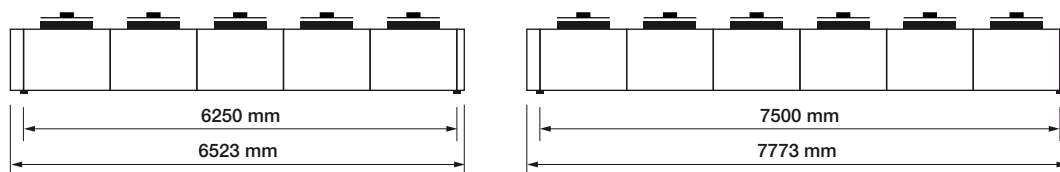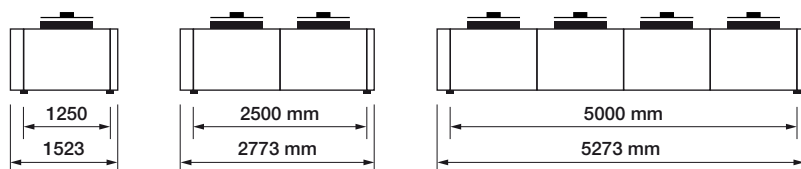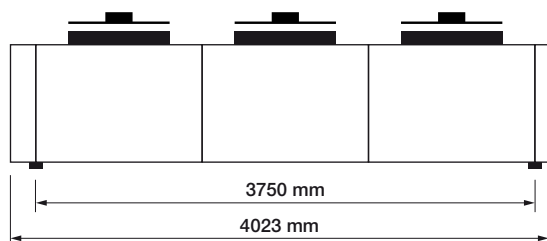

ZONDA-L H 80

V-type single-row condenser



3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-L H 80-1 A 2,1 V AC 06D	80	139,7	21150	46	1x1	800	880	1720	3,9	16,4	183	2x35	2x28
ZONDA-L H 80-1 B 2,1 V AC 06D	92,8	209,5	20450	46	1x1	800	880	1720	3,9	23,4	205	2x35	2x28
ZONDA-L H 80-1 C 2,1 V AC 06D	97,2	279	19800	46	1x1	800	880	1720	3,9	31,4	228	2x35	2x28
ZONDA-L H 80-2 A 2,1 V AC 06D	159,6	279	42350	49	1x2	800	880	3440	7,8	31,4	323	2x42	2x35
ZONDA-L H 80-2 B 2,1 V AC 06D	186,3	419	40950	49	1x2	800	880	3440	7,8	47,1	369	2x54	2x42
ZONDA-L H 80-2 C 2,1 V AC 06D	194,9	558	39600	49	1x2	800	880	3440	7,8	62,1	414	2x54	2x42
ZONDA-L H 80-3 A 2,1 V AC 06D	240,4	419	63500	51	1x3	800	880	5160	11,7	47,1	465	2x54	2x42
ZONDA-L H 80-3 B 2,1 V AC 06D	279,7	628,5	61400	51	1x3	800	880	5160	11,7	70,9	533	2x54	2x42
ZONDA-L H 80-3 C 2,1 V AC 06D	293	837,9	59350	51	1x3	800	880	5160	11,7	92,9	600	2x54	2x42
ZONDA-L H 80-4 A 2,1 V AC 06D	318,5	558,6	84700	52	1x4	800	880	6880	15,6	63,9	606	2x54	2x42
ZONDA-L H 80-4 B 2,1 V AC 06D	375,4	837,9	81850	52	1x4	800	880	6880	15,6	95,3	696	2x64	2x54
ZONDA-L H 80-4 C 2,1 V AC 06D	395,5	698,3	79150	52	1x5	800	880	6880	15,6	124,3	786	2x64	2x54
ZONDA-L H 80-5 A 2,1 V AC 06D	402,1	1117,3	105850	53	1x4	800	880	8600	19,5	77,9	747	2x64	2x54
ZONDA-L H 80-5 B 2,1 V AC 06D	469,5	1047,4	102300	53	1x5	800	880	8600	19,5	117,3	860	2x76	2x64
ZONDA-L H 80-5 C 2,1 V AC 06D	492,5	837,9	98950	53	1x6	800	880	8600	19,5	153,3	973	2x76	2x64
ZONDA-L H 80-6 A 2,1 V AC 06D	481,7	1396,6	127050	53	1x5	800	880	10320	23,4	92,9	888	2x76	2x64
ZONDA-L H 80-6 B 2,1 V AC 06D	560,1	1256,9	122800	53	1x6	800	880	10320	23,4	139,3	1023	2x76	2x64
ZONDA-L H 80-6 C 2,1 V AC 06D	586,6	977,6	118750	53	1x7	800	880	10320	23,4	182,3	1159	2x76	2x64
ZONDA-L H 80-7 A 2,1 V AC 06D	551,2	1675,9	148200	54	1x6	800	880	12040	27,3	106,9	1028	2x76	2x54
ZONDA-L H 80-7 B 2,1 V AC 06D	654,7	1466,4	143250	54	1x7	800	880	12040	27,3	160,3	1186	2x76	2x64
ZONDA-L H 80-7 C 2,1 V AC 06D	692,7	1117,3	138500	54	1x8	800	880	12040	27,3	211,3	1344	2x76	2x64
ZONDA-L H 80-8 A 2,1 V AC 06D	637,2	1955,2	169400	54	1x7	800	880	13760	31,2	124,3	1169	2x76	2x64
ZONDA-L H 80-8 B 2,1 V AC 06D	751	1675,9	163700	54	1x8	800	880	13760	31,2	189,2	1350	2x76	2x64
ZONDA-L H 80-8 C 2,1 V AC 06D	791,2	2234,5	158300	54	1x8	800	880	13760	31,2	247,2	1530	2x76	2x64

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-L H 80-1 A 2,1 V AC 08D	66,3	139,7	15350	39	1x1	800	680	770	2,22	16,4	183	2x35	2x28
ZONDA-L H 80-1 B 2,1 V AC 08D	72,4	209,5	14800	39	1x1	800	680	770	2,22	23,4	205	2x35	2x28
ZONDA-L H 80-1 C 2,1 V AC 08D	73,3	279	14400	39	1x1	800	680	770	2,22	31,4	228	2x35	2x28
ZONDA-L H 80-2 A 2,1 V AC 08D	132,4	279	30650	42	1x2	800	680	1540	4,44	31,4	323	2x42	2x35
ZONDA-L H 80-2 B 2,1 V AC 08D	145,2	419	29650	42	1x2	800	680	1540	4,44	47,1	369	2x54	2x42
ZONDA-L H 80-2 C 2,1 V AC 08D	146,9	558	28750	42	1x2	800	680	1540	4,44	62,1	414	2x54	2x42
ZONDA-L H 80-3 A 2,1 V AC 08D	199,4	419	46000	44	1x3	800	680	2310	6,66	47,1	465	2x54	2x42
ZONDA-L H 80-3 B 2,1 V AC 08D	218	628,5	44450	44	1x3	800	680	2310	6,66	70,9	533	2x54	2x42
ZONDA-L H 80-3 C 2,1 V AC 08D	220,7	837,9	43150	44	1x3	800	680	2310	6,66	92,9	600	2x54	2x42
ZONDA-L H 80-4 A 2,1 V AC 08D	264	558,6	61300	45	1x4	800	680	3080	8,88	63,9	606	2x54	2x42
ZONDA-L H 80-4 B 2,1 V AC 08D	292,3	837,9	59300	45	1x4	800	680	3080	8,88	95,3	696	2x64	2x54
ZONDA-L H 80-4 C 2,1 V AC 08D	297,2	1117,3	57500	45	1x4	800	680	3080	8,88	124,3	786	2x64	2x54
ZONDA-L H 80-5 A 2,1 V AC 08D	333	698,3	76650	46	1x5	800	680	3850	11,1	77,9	747	2x64	2x54
ZONDA-L H 80-5 B 2,1 V AC 08D	365,4	1047,4	74100	46	1x5	800	680	3850	11,1	117,3	860	2x76	2x64
ZONDA-L H 80-5 C 2,1 V AC 08D	370	1396,6	71900	46	1x5	800	680	3850	11,1	153,3	973	2x76	2x64
ZONDA-L H 80-6 A 2,1 V AC 08D	399,3	837,9	92000	46	1x6	800	680	4620	13,32	92,9	888	2x76	2x64
ZONDA-L H 80-6 B 2,1 V AC 08D	436,4	1256,9	88900	46	1x6	800	680	4620	13,32	139,3	1023	2x76	2x64
ZONDA-L H 80-6 C 2,1 V AC 08D	441,6	1675,9	86300	46	1x6	800	680	4620	13,32	182,3	1159	2x76	2x64
ZONDA-L H 80-7 A 2,1 V AC 08D	457,6	977,6	107300	47	1x7	800	680	5390	15,54	106,9	1028	2x76	2x54
ZONDA-L H 80-7 B 2,1 V AC 08D	510,5	1466,4	103750	47	1x7	800	680	5390	15,54	160,3	1186	2x76	2x64
ZONDA-L H 80-7 C 2,1 V AC 08D	520,6	1955,2	100650	47	1x7	800	680	5390	15,54	211,3	1344	2x76	2x64
ZONDA-L H 80-8 A 2,1 V AC 08D	528,3	1117,3	122650	47	1x8	800	680	6160	17,76	124,3	1169	2x76	2x64
ZONDA-L H 80-8 B 2,1 V AC 08D	584,8	1675,9	118550	47	1x8	800	680	6160	17,76	189,2	1350	2x76	2x64
ZONDA-L H 80-8 C 2,1 V AC 08D	594,4	2234,5	115050	47	1x8	800	680	6160	17,76	247,2	1530	2x76	2x64

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA H 90

V-type single-row condenser



Ø 900 mm


FAN SIZE

51 ÷ 1100 kW

DT 15K CAPACITY


1 ÷ 8

NUMBER OF FANS

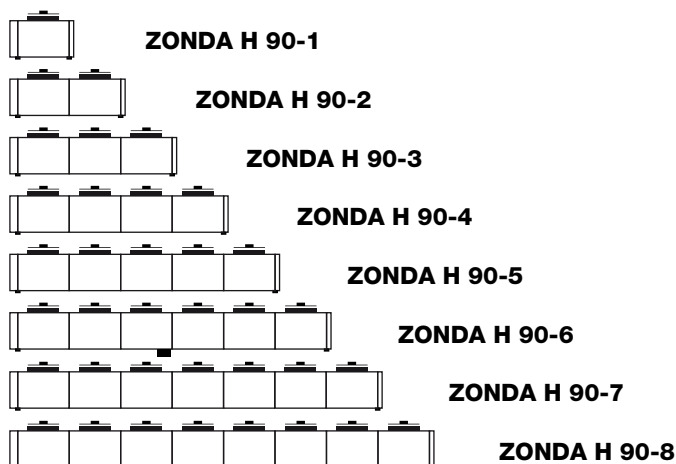

DIMENSIONS

ZONDA H 90-1/2/3/4/5/6/7/8

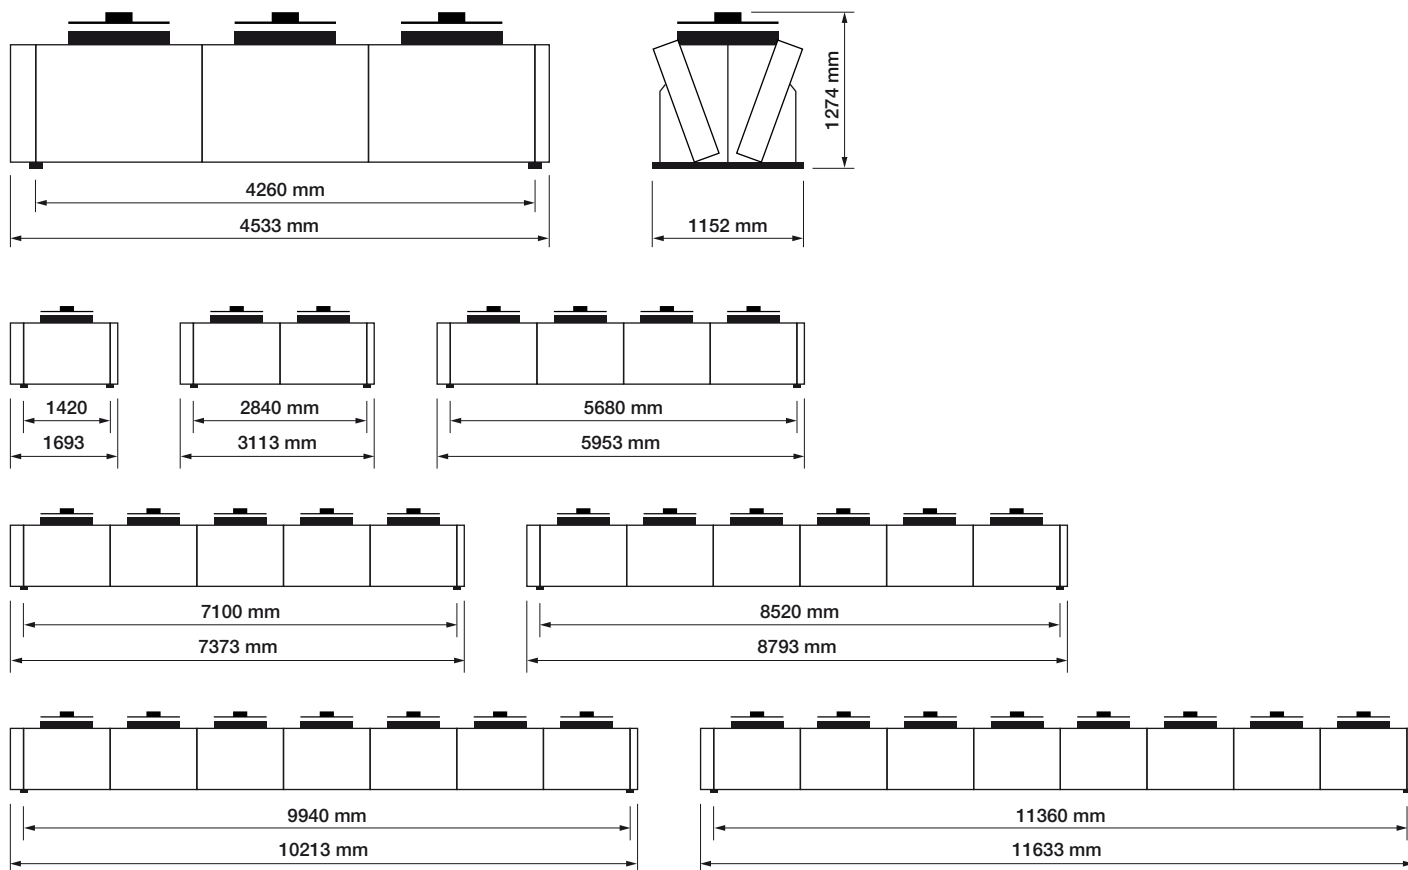

ZONDA H 90

V-type single-row condenser



3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA H 90-1 B 2,1 V AC 04D	124,1	178,3	31400	60	1x1	900	1260	4600	7,8	20,1	188	2x35	2x28
ZONDA H 90-1 C 2,1 V AC 04D	136,8	238	29950	60	1x1	900	1260	4600	7,8	26,1	207	2x35	2x28
ZONDA H 90-2 B 2,1 V AC 04D	249	356,6	62800	63	1x2	900	1260	9200	15,6	39,7	342	2x42	2x35
ZONDA H 90-2 C 2,1 V AC 04D	274,3	476	59850	63	1x2	900	1260	9200	15,6	53,9	381	2x54	2x42
ZONDA H 90-3 B 2,1 V AC 04D	360,5	534,9	94200	65	1x3	900	1260	13800	23,4	57,7	498	2x54	2x42
ZONDA H 90-3 C 2,1 V AC 04D	397,3	713,9	89800	65	1x3	900	1260	13800	23,4	78,9	556	2x54	2x42
ZONDA H 90-4 B 2,1 V AC 04D	499,7	713,9	125650	66	1x4	900	1260	18400	31,2	78,9	653	2x64	2x54
ZONDA H 90-4 C 2,1 V AC 04D	549,2	951,9	119750	66	1x4	900	1260	18400	31,2	105,8	730	2x64	2x54
ZONDA H 90-5 B 2,1 V AC 04D	617,6	892,4	157050	67	1x5	900	1260	23000	39	97,9	809	2x64	2x54
ZONDA H 90-5 C 2,1 V AC 04D	677,1	1189,9	149650	67	1x5	900	1260	23000	39	130,8	905	2x76	2x64
ZONDA H 90-6 B 2,1 V AC 04D	725,3	1070,9	188450	67	1x6	900	1260	27600	46,8	115,9	964	2x76	2x64
ZONDA H 90-6 C 2,1 V AC 04D	796,1	1427,9	179600	67	1x6	900	1260	27600	46,8	154,8	1079	2x76	2x64
ZONDA H 90-7 B 2,1 V AC 04D	875,5	1249,4	219850	68	1x7	900	1260	32200	54,6	139,1	1119	2x76	2x64
ZONDA H 90-7 C 2,1 V AC 04D	965,4	1665,8	209550	68	1x7	900	1260	32200	54,6	185,2	1253	2x76	2x76
ZONDA H 90-8 B 2,1 V AC 04D	1000,2	1427,9	251250	68	1x8	900	1260	36800	62,4	157,1	1273	2x76	2x64
ZONDA H 90-8 C 2,1 V AC 04D	1099	1903,8	239500	68	1x8	900	1260	36800	62,4	210,2	1427	2x76	2x76

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA H 90-1 A 2,1 V AC 06D	88,4	119	26650	52	1x1	900	885	2260	5,15	14,1	168	2x28	2x22
ZONDA H 90-1 B 2,1 V AC 06D	106,4	178,3	25100	52	1x1	900	885	2260	5,15	20,1	188	2x35	2x28
ZONDA H 90-1 C 2,1 V AC 06D	113,6	238	23750	52	1x1	900	885	2260	5,15	26,1	207	2x35	2x28
ZONDA H 90-2 A 2,1 V AC 06D	177,3	238	53300	55	1x2	900	885	4520	10,3	26,7	304	2x35	2x28
ZONDA H 90-2 B 2,1 V AC 06D	213,4	356,6	50250	55	1x2	900	885	4520	10,3	39,7	342	2x42	2x35
ZONDA H 90-2 C 2,1 V AC 06D	227,6	476	47550	55	1x2	900	885	4520	10,3	53,9	381	2x54	2x42
ZONDA H 90-3 A 2,1 V AC 06D	260,4	357	79950	57	1x3	900	885	6780	15,45	39,7	441	2x35	2x28
ZONDA H 90-3 B 2,1 V AC 06D	311,4	534,9	75350	57	1x3	900	885	6780	15,45	57,7	498	2x54	2x42
ZONDA H 90-3 C 2,1 V AC 06D	332,2	713,9	71300	57	1x3	900	885	6780	15,45	78,9	556	2x54	2x42
ZONDA H 90-4 A 2,1 V AC 06D	355,2	476	106600	58	1x4	900	885	9040	20,6	53,9	576	2x54	2x42
ZONDA H 90-4 B 2,1 V AC 06D	428	713,9	100500	58	1x4	900	885	9040	20,6	78,9	653	2x64	2x54
ZONDA H 90-4 C 2,1 V AC 06D	455,7	951,9	95050	58	1x4	900	885	9040	20,6	105,8	730	2x64	2x54
ZONDA H 90-5 A 2,1 V AC 06D	442,8	594,9	133250	59	1x5	900	885	11300	25,75	66,9	713	2x54	2x42
ZONDA H 90-5 B 2,1 V AC 06D	530,7	892,4	125600	59	1x5	900	885	11300	25,75	97,9	809	2x64	2x54
ZONDA H 90-5 C 2,1 V AC 06D	563,6	1189,9	118850	59	1x5	900	885	11300	25,75	130,8	905	2x76	2x64
ZONDA H 90-6 A 2,1 V AC 06D	522,2	713,9	159900	59	1x6	900	885	13560	30,9	78,9	848	2x54	2x42
ZONDA H 90-6 B 2,1 V AC 06D	625,9	1070,9	150700	59	1x6	900	885	13560	30,9	115,9	964	2x76	2x64
ZONDA H 90-6 C 2,1 V AC 06D	665,5	1427,9	142600	59	1x6	900	885	13560	30,9	154,8	1079	2x76	2x64
ZONDA H 90-7 A 2,1 V AC 06D	618,1	832,9	186550	60	1x7	900	885	15820	36,05	92,8	984	2x64	2x54
ZONDA H 90-7 B 2,1 V AC 06D	749,3	1249,4	175850	60	1x7	900	885	15820	36,05	139,1	1119	2x76	2x64
ZONDA H 90-7 C 2,1 V AC 06D	800,2	1665,8	166350	60	1x7	900	885	15820	36,05	185,2	1253	2x76	2x76
ZONDA H 90-8 A 2,1 V AC 06D	711	951,9	213200	60	1x8	900	885	18080	41,2	105,8	1120	2x64	2x54
ZONDA H 90-8 B 2,1 V AC 06D	856,6	1427,9	200950	60	1x8	900	885	18080	41,2	157,1	1273	2x76	2x64
ZONDA H 90-8 C 2,1 V AC 06D	911,8	1903,8	190100	60	1x8	900	885	18080	41,2	210,2	1427	2x76	2x76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA H 90

V-type single-row condenser



3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA H 90-1 A 2,1 V AC 08D	71,2	119	17750	41	1x1	900	670	830	2,27	14,1	168	2x28	2x22
ZONDA H 90-1 B 2,1 V AC 08D	79,2	178,3	16800	41	1x1	900	670	830	2,27	20,1	188	2x35	2x28
ZONDA H 90-1 C 2,1 V AC 08D	80,6	238	15900	41	1x1	900	670	830	2,27	26,1	207	2x35	2x28
ZONDA H 90-2 A 2,1 V AC 08D	141	238	35500	44	1x2	900	670	1660	4,54	26,7	304	2x35	2x28
ZONDA H 90-2 B 2,1 V AC 08D	158,7	356,6	33550	44	1x2	900	670	1660	4,54	39,7	342	2x42	2x35
ZONDA H 90-2 C 2,1 V AC 08D	161,4	476	31850	44	1x2	900	670	1660	4,54	53,9	381	2x54	2x42
ZONDA H 90-3 A 2,1 V AC 08D	209,1	357	53250	46	1x3	900	670	2490	6,81	39,7	441	2x35	2x28
ZONDA H 90-3 B 2,1 V AC 08D	233,7	534,9	50350	46	1x3	900	670	2490	6,81	57,7	498	2x54	2x42
ZONDA H 90-3 C 2,1 V AC 08D	237,6	713,9	47750	46	1x3	900	670	2490	6,81	78,9	556	2x54	2x42
ZONDA H 90-4 A 2,1 V AC 08D	282,4	476	71000	47	1x4	900	670	3320	9,08	53,9	576	2x54	2x42
ZONDA H 90-4 B 2,1 V AC 08D	318	713,9	67150	47	1x4	900	670	3320	9,08	78,9	653	2x64	2x54
ZONDA H 90-4 C 2,1 V AC 08D	323	951,9	63700	47	1x4	900	670	3320	9,08	105,8	730	2x64	2x54
ZONDA H 90-5 A 2,1 V AC 08D	353,3	594,9	88750	48	1x5	900	670	4150	11,35	66,9	713	2x54	2x42
ZONDA H 90-5 B 2,1 V AC 08D	395,4	892,4	83900	48	1x5	900	670	4150	11,35	97,9	809	2x64	2x54
ZONDA H 90-5 C 2,1 V AC 08D	400,8	1189,9	79600	48	1x5	900	670	4150	11,35	130,8	905	2x76	2x64
ZONDA H 90-6 A 2,1 V AC 08D	419,1	713,9	106500	48	1x6	900	670	4980	13,62	78,9	848	2x54	2x42
ZONDA H 90-6 B 2,1 V AC 08D	469	1070,9	100700	48	1x6	900	670	4980	13,62	115,9	964	2x76	2x64
ZONDA H 90-6 C 2,1 V AC 08D	475,7	1427,9	95550	48	1x6	900	670	4980	13,62	154,8	1079	2x76	2x64
ZONDA H 90-7 A 2,1 V AC 08D	491,2	832,9	124250	49	1x7	900	670	5810	15,89	92,8	984	2x64	2x54
ZONDA H 90-7 B 2,1 V AC 08D	556,4	1249,4	117500	49	1x7	900	670	5810	15,89	139,1	1119	2x76	2x64
ZONDA H 90-7 C 2,1 V AC 08D	566,6	1665,8	111450	49	1x7	900	670	5810	15,89	185,2	1253	2x76	2x76
ZONDA H 90-8 A 2,1 V AC 08D	565,2	951,9	142000	49	1x8	900	670	6640	18,16	105,8	1120	2x64	2x54
ZONDA H 90-8 B 2,1 V AC 08D	636,3	1427,9	134250	49	1x8	900	670	6640	18,16	157,1	1273	2x76	2x64
ZONDA H 90-8 C 2,1 V AC 08D	646,2	1903,8	127400	49	1x8	900	670	6640	18,16	210,2	1427	2x76	2x76

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA H 90-1 A 2,1 V AC 12D	51,7	119	11300	30	1x1	900	440	280	0,83	14,1	168	2x28	2x22
ZONDA H 90-1 B 2,1 V AC 12D	53,8	178,3	10650	30	1x1	900	440	280	0,83	20,1	188	2x35	2x28
ZONDA H 90-1 C 2,1 V AC 12D	52,1	238	10000	30	1x1	900	440	280	0,83	26,1	207	2x35	2x28
ZONDA H 90-2 A 2,1 V AC 12D	103,5	238	22600	33	1x2	900	440	560	1,66	26,7	304	2x35	2x28
ZONDA H 90-2 B 2,1 V AC 12D	107,6	356,6	21250	33	1x2	900	440	560	1,66	39,7	342	2x42	2x35
ZONDA H 90-2 C 2,1 V AC 12D	104,2	476	20000	33	1x2	900	440	560	1,66	53,9	381	2x54	2x42
ZONDA H 90-3 A 2,1 V AC 12D	154,3	357	33850	35	1x3	900	440	840	2,49	39,7	441	2x35	2x28
ZONDA H 90-3 B 2,1 V AC 12D	159,5	534,9	31900	35	1x3	900	440	840	2,49	57,7	498	2x54	2x42
ZONDA H 90-3 C 2,1 V AC 12D	154,5	713,9	30000	35	1x3	900	440	840	2,49	78,9	556	2x54	2x42
ZONDA H 90-4 A 2,1 V AC 12D	207,2	476	45150	36	1x4	900	440	1120	3,32	53,9	576	2x54	2x42
ZONDA H 90-4 B 2,1 V AC 12D	215,5	713,9	42550	36	1x4	900	440	1120	3,32	78,9	653	2x64	2x54
ZONDA H 90-4 C 2,1 V AC 12D	208,5	951,9	40000	36	1x4	900	440	1120	3,32	105,8	730	2x64	2x54
ZONDA H 90-5 A 2,1 V AC 12D	259,4	594,9	56450	37	1x5	900	440	1400	4,15	66,9	713	2x54	2x42
ZONDA H 90-5 B 2,1 V AC 12D	268,4	892,4	53150	37	1x5	900	440	1400	4,15	97,9	809	2x64	2x54
ZONDA H 90-5 C 2,1 V AC 12D	259,2	1189,9	50000	37	1x5	900	440	1400	4,15	130,8	905	2x76	2x64
ZONDA H 90-6 A 2,1 V AC 12D	309,1	713,9	67750	37	1x6	900	440	1680	4,98	78,9	848	2x54	2x42
ZONDA H 90-6 B 2,1 V AC 12D	319,6	1070,9	63800	37	1x6	900	440	1680	4,98	115,9	964	2x76	2x64
ZONDA H 90-6 C 2,1 V AC 12D	309,1	1427,9	60000	37	1x6	900	440	1680	4,98	154,8	1079	2x76	2x64
ZONDA H 90-7 A 2,1 V AC 12D	360,6	832,9	79000	38	1x7	900	440	1960	5,81	92,8	984	2x64	2x54
ZONDA H 90-7 B 2,1 V AC 12D	377,3	1249,4	74450	38	1x7	900	440	1960	5,81	139,1	1119	2x76	2x64
ZONDA H 90-7 C 2,1 V AC 12D	365,5	1665,8	70050	38	1x7	900	440	1960	5,81	185,2	1253	2x76	2x76
ZONDA H 90-8 A 2,1 V AC 12D	414,5	951,9	90300	38	1x8	900	440	2240	6,64	105,8	1120	2x64	2x54
ZONDA H 90-8 B 2,1 V AC 12D	431,1	1427,9	85050	38	1x8	900	440	2240	6,64	157,1	1273	2x76	2x64
ZONDA H 90-8 C 2,1 V AC 12D	417	1903,8	80050	38	1x8	900	440	2240	6,64	210,2	1427	2x76	2x76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA-L H 90

V-type single-row condenser



Ø 900 mm

FAN SIZE

54 ÷ 1180 kW

DT 15K CAPACITY

1 ÷ 8


NUMBER OF FANS



ZONDA-L H 90-1



ZONDA-L H 90-2



ZONDA-L H 90-3



ZONDA-L H 90-4



ZONDA-L H 90-5



ZONDA-L H 90-6








ZONDA-L H 90-7



ZONDA-L H 90-8

DIMENSIONS

ZONDA-L H 90-1/2/3/4/5/6/7/8

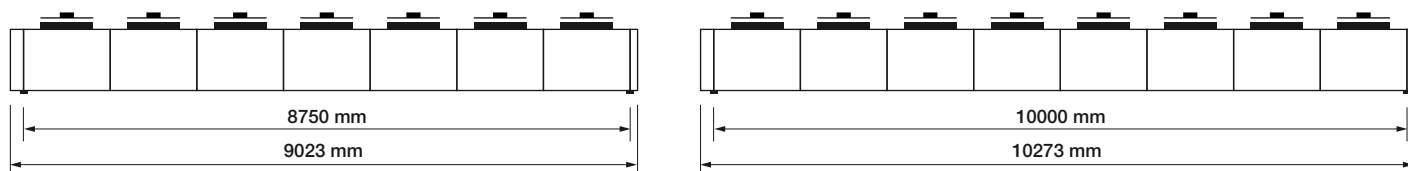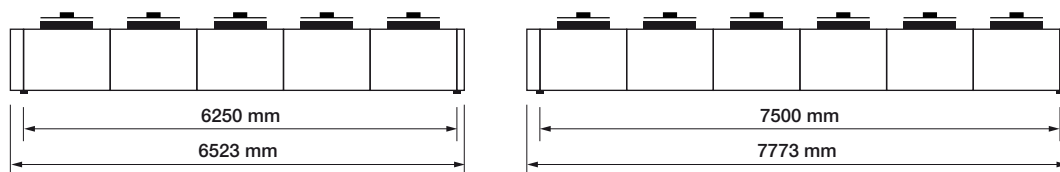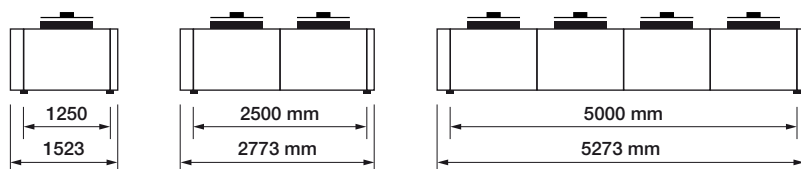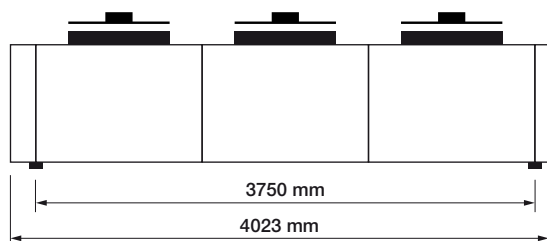

ZONDA-L H 90

V-type single-row condenser



3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-L H 90-1 B 2,1 V AC 04D	131	209,5	32550	60	1x1	900	1260	4600	7,8	23,4	205	2x35	2x28
ZONDA-L H 90-1 C 2,1 V AC 04D	142,8	279	31300	60	1x1	900	1260	4600	7,8	31,4	228	2x35	2x28
ZONDA-L H 90-2 B 2,1 V AC 04D	263,4	419	65100	63	1x2	900	1260	9200	15,6	47,1	369	2x54	2x42
ZONDA-L H 90-2 C 2,1 V AC 04D	286,9	558	62650	63	1x2	900	1260	9200	15,6	62,1	414	2x54	2x42
ZONDA-L H 90-3 B 2,1 V AC 04D	395,8	628,5	97700	65	1x3	900	1260	13800	23,4	70,9	533	2x54	2x42
ZONDA-L H 90-3 C 2,1 V AC 04D	432	837,9	93950	65	1x3	900	1260	13800	23,4	92,9	600	2x54	2x42
ZONDA-L H 90-4 B 2,1 V AC 04D	536	837,9	130250	66	1x4	900	1260	18400	31,2	95,3	696	2x64	2x54
ZONDA-L H 90-4 C 2,1 V AC 04D	588,3	1117,3	125250	66	1x4	900	1260	18400	31,2	124,3	786	2x64	2x54
ZONDA-L H 90-5 B 2,1 V AC 04D	668,5	1047,4	162800	67	1x5	900	1260	23000	39	117,3	860	2x76	2x64
ZONDA-L H 90-5 C 2,1 V AC 04D	730,1	1396,6	156600	67	1x5	900	1260	23000	39	153,3	973	2x76	2x64
ZONDA-L H 90-6 B 2,1 V AC 04D	793,1	1256,9	195400	67	1x6	900	1260	27600	46,8	139,3	1023	2x76	2x64
ZONDA-L H 90-6 C 2,1 V AC 04D	865,3	1675,9	187900	67	1x6	900	1260	27600	46,8	182,3	1159	2x76	2x64
ZONDA-L H 90-7 B 2,1 V AC 04D	935,4	1466,4	227950	68	1x7	900	1260	32200	54,6	160,3	1186	2x76	2x64
ZONDA-L H 90-7 C 2,1 V AC 04D	1031,3	1955,2	219250	68	1x7	900	1260	32200	54,6	211,3	1344	2x76	2x64
ZONDA-L H 90-8 B 2,1 V AC 04D	1072,7	1675,9	260500	68	1x8	900	1260	36800	62,4	189,2	1350	2x76	2x64
ZONDA-L H 90-8 C 2,1 V AC 04D	1177,2	2234,5	250550	68	1x8	900	1260	36800	62,4	247,2	1530	2x76	2x64

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-L H 90-1 A 2,1 V AC 06D	93,8	139,7	27450	52	1x1	900	885	2260	5,15	16,4	183	2x35	2x28
ZONDA-L H 90-1 B 2,1 V AC 06D	111,5	209,5	26200	52	1x1	900	885	2260	5,15	23,4	205	2x35	2x28
ZONDA-L H 90-1 C 2,1 V AC 06D	118,7	279	25050	52	1x1	900	885	2260	5,15	31,4	228	2x35	2x28
ZONDA-L H 90-2 A 2,1 V AC 06D	186,6	279	54900	55	1x2	900	885	4520	10,3	31,4	323	2x42	2x35
ZONDA-L H 90-2 B 2,1 V AC 06D	224	419	52350	55	1x2	900	885	4520	10,3	47,1	369	2x54	2x42
ZONDA-L H 90-2 C 2,1 V AC 06D	238,3	558	50100	55	1x2	900	885	4520	10,3	62,1	414	2x54	2x42
ZONDA-L H 90-3 A 2,1 V AC 06D	281,4	419	82350	57	1x3	900	885	6780	15,45	47,1	465	2x54	2x42
ZONDA-L H 90-3 B 2,1 V AC 06D	336,5	628,5	78550	57	1x3	900	885	6780	15,45	70,9	533	2x54	2x42
ZONDA-L H 90-3 C 2,1 V AC 06D	358,4	837,9	75150	57	1x3	900	885	6780	15,45	92,9	600	2x54	2x42
ZONDA-L H 90-4 A 2,1 V AC 06D	374,4	558,6	109850	58	1x4	900	885	9040	20,6	63,9	606	2x54	2x42
ZONDA-L H 90-4 B 2,1 V AC 06D	453,2	837,9	104750	58	1x4	900	885	9040	20,6	95,3	696	2x64	2x54
ZONDA-L H 90-4 C 2,1 V AC 06D	485,5	1117,3	100200	58	1x4	900	885	9040	20,6	124,3	786	2x64	2x54
ZONDA-L H 90-5 A 2,1 V AC 06D	472,2	698,3	137300	59	1x5	900	885	11300	25,75	77,9	747	2x64	2x54
ZONDA-L H 90-5 B 2,1 V AC 06D	566,3	1047,4	130950	59	1x5	900	885	11300	25,75	117,3	860	2x76	2x64
ZONDA-L H 90-5 C 2,1 V AC 06D	603,7	1396,6	125250	59	1x5	900	885	11300	25,75	153,3	973	2x76	2x64
ZONDA-L H 90-6 A 2,1 V AC 06D	564	837,9	164750	59	1x6	900	885	13560	30,9	92,9	888	2x76	2x64
ZONDA-L H 90-6 B 2,1 V AC 06D	674,1	1256,9	157100	59	1x6	900	885	13560	30,9	139,3	1023	2x76	2x64
ZONDA-L H 90-6 C 2,1 V AC 06D	717,6	1675,9	150300	59	1x6	900	885	13560	30,9	182,3	1159	2x76	2x64
ZONDA-L H 90-7 A 2,1 V AC 06D	647,9	977,6	192200	60	1x7	900	885	15820	36,05	106,9	1028	2x76	2x54
ZONDA-L H 90-7 B 2,1 V AC 06D	790,5	1466,4	183300	60	1x7	900	885	15820	36,05	160,3	1186	2x76	2x64
ZONDA-L H 90-7 C 2,1 V AC 06D	850,5	1955,2	175350	60	1x7	900	885	15820	36,05	211,3	1344	2x76	2x64
ZONDA-L H 90-8 A 2,1 V AC 06D	749,2	1117,3	219650	60	1x8	900	885	18080	41,2	124,3	1169	2x76	2x64
ZONDA-L H 90-8 B 2,1 V AC 06D	906,8	1675,9	209500	60	1x8	900	885	18080	41,2	189,2	1350	2x76	2x64
ZONDA-L H 90-8 C 2,1 V AC 06D	971,4	2234,5	200400	60	1x8	900	885	18080	41,2	247,2	1530	2x76	2x64

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA-L H 90

V-type single-row condenser



3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-L H 90-1 A 2,1 V AC 08D	75,9	139,7	18300	41	1x1	900	670	830	2,27	16,4	183	2x35	2x28
ZONDA-L H 90-1 B 2,1 V AC 08D	83,6	209,5	17450	41	1x1	900	670	830	2,27	23,4	205	2x35	2x28
ZONDA-L H 90-1 C 2,1 V AC 08D	84,4	279	16750	41	1x1	900	670	830	2,27	31,4	228	2x35	2x28
ZONDA-L H 90-2 A 2,1 V AC 08D	151,3	279	36550	44	1x2	900	670	1660	4,54	31,4	323	2x42	2x35
ZONDA-L H 90-2 B 2,1 V AC 08D	167,7	419	34950	44	1x2	900	670	1660	4,54	47,1	369	2x54	2x42
ZONDA-L H 90-2 C 2,1 V AC 08D	169,3	558	33450	44	1x2	900	670	1660	4,54	62,1	414	2x54	2x42
ZONDA-L H 90-3 A 2,1 V AC 08D	227,9	419	54850	46	1x3	900	670	2490	6,81	47,1	465	2x54	2x42
ZONDA-L H 90-3 B 2,1 V AC 08D	251,8	628,5	52400	46	1x3	900	670	2490	6,81	70,9	533	2x54	2x42
ZONDA-L H 90-3 C 2,1 V AC 08D	254,4	837,9	50200	46	1x3	900	670	2490	6,81	92,9	600	2x54	2x42
ZONDA-L H 90-4 A 2,1 V AC 08D	302,5	558,6	73100	47	1x4	900	670	3320	9,08	63,9	606	2x54	2x42
ZONDA-L H 90-4 B 2,1 V AC 08D	338,4	837,9	69900	47	1x4	900	670	3320	9,08	95,3	696	2x64	2x54
ZONDA-L H 90-4 C 2,1 V AC 08D	343,2	1117,3	66900	47	1x4	900	670	3320	9,08	124,3	786	2x64	2x54
ZONDA-L H 90-5 A 2,1 V AC 08D	381,3	698,3	91400	48	1x5	900	670	4150	11,35	77,9	747	2x64	2x54
ZONDA-L H 90-5 B 2,1 V AC 08D	422,7	1047,4	87350	48	1x5	900	670	4150	11,35	117,3	860	2x76	2x64
ZONDA-L H 90-5 C 2,1 V AC 08D	427,3	1396,6	83650	48	1x5	900	670	4150	11,35	153,3	973	2x76	2x64
ZONDA-L H 90-6 A 2,1 V AC 08D	456,4	837,9	109650	48	1x6	900	670	4980	13,62	92,9	888	2x76	2x64
ZONDA-L H 90-6 B 2,1 V AC 08D	504,1	1256,9	104800	48	1x6	900	670	4980	13,62	139,3	1023	2x76	2x64
ZONDA-L H 90-6 C 2,1 V AC 08D	509,2	1675,9	100400	48	1x6	900	670	4980	13,62	182,3	1159	2x76	2x64
ZONDA-L H 90-7 A 2,1 V AC 08D	524,2	977,6	127950	49	1x7	900	670	5810	15,89	106,9	1028	2x76	2x54
ZONDA-L H 90-7 B 2,1 V AC 08D	590,7	1466,4	122300	49	1x7	900	670	5810	15,89	160,3	1186	2x76	2x64
ZONDA-L H 90-7 C 2,1 V AC 08D	601,5	1955,2	117100	49	1x7	900	670	5810	15,89	211,3	1344	2x76	2x64
ZONDA-L H 90-8 A 2,1 V AC 08D	605,3	1117,3	146200	49	1x8	900	670	6640	18,16	124,3	1169	2x76	2x64
ZONDA-L H 90-8 B 2,1 V AC 08D	676,9	1675,9	139750	49	1x8	900	670	6640	18,16	189,2	1350	2x76	2x64
ZONDA-L H 90-8 C 2,1 V AC 08D	686,7	2234,5	133850	49	1x8	900	670	6640	18,16	247,2	1530	2x76	2x64

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA-L H 90-1 A 2,1 V AC 12D	54,3	139,7	11600	30	1x1	900	440	280	0,83	16,4	183	2x35	2x28
ZONDA-L H 90-1 B 2,1 V AC 12D	56,1	209,5	11050	30	1x1	900	440	280	0,83	23,4	205	2x35	2x28
ZONDA-L H 90-1 C 2,1 V AC 12D	54,7	279	10600	30	1x1	900	440	280	0,83	31,4	228	2x35	2x28
ZONDA-L H 90-2 A 2,1 V AC 12D	108,4	279	23200	33	1x2	900	440	560	1,66	31,4	323	2x42	2x35
ZONDA-L H 90-2 B 2,1 V AC 12D	112,4	419	22150	33	1x2	900	440	560	1,66	47,1	369	2x54	2x42
ZONDA-L H 90-2 C 2,1 V AC 12D	109,6	558	21150	33	1x2	900	440	560	1,66	62,1	414	2x54	2x42
ZONDA-L H 90-3 A 2,1 V AC 12D	163	419	34750	35	1x3	900	440	840	2,49	47,1	465	2x54	2x42
ZONDA-L H 90-3 B 2,1 V AC 12D	168,6	628,5	33200	35	1x3	900	440	840	2,49	70,9	533	2x54	2x42
ZONDA-L H 90-3 C 2,1 V AC 12D	164,6	837,9	31750	35	1x3	900	440	840	2,49	92,9	600	2x54	2x42
ZONDA-L H 90-4 A 2,1 V AC 12D	216,1	558,6	46350	36	1x4	900	440	1120	3,32	63,9	606	2x54	2x42
ZONDA-L H 90-4 B 2,1 V AC 12D	226,1	837,9	44300	36	1x4	900	440	1120	3,32	95,3	696	2x64	2x54
ZONDA-L H 90-4 C 2,1 V AC 12D	221,3	1117,3	42300	36	1x4	900	440	1120	3,32	124,3	786	2x64	2x54
ZONDA-L H 90-5 A 2,1 V AC 12D	272,2	698,3	57950	37	1x5	900	440	1400	4,15	77,9	747	2x64	2x54
ZONDA-L H 90-5 B 2,1 V AC 12D	282,3	1047,4	55350	37	1x5	900	440	1400	4,15	117,3	860	2x76	2x64
ZONDA-L H 90-5 C 2,1 V AC 12D	275,7	1396,6	52900	37	1x5	900	440	1400	4,15	153,3	973	2x76	2x64
ZONDA-L H 90-6 A 2,1 V AC 12D	326,4	837,9	69550	37	1x6	900	440	1680	4,98	92,9	888	2x76	2x64
ZONDA-L H 90-6 B 2,1 V AC 12D	337,5	1256,9	66400	37	1x6	900	440	1680	4,98	139,3	1023	2x76	2x64
ZONDA-L H 90-6 C 2,1 V AC 12D	329,4	1675,9	63450	37	1x6	900	440	1680	4,98	182,3	1159	2x76	2x64
ZONDA-L H 90-7 A 2,1 V AC 12D	375,1	977,6	81150	38	1x7	900	440	1960	5,81	106,9	1028	2x76	2x54
ZONDA-L H 90-7 B 2,1 V AC 12D	395,2	1466,4	77500	38	1x7	900	440	1960	5,81	160,3	1186	2x76	2x64
ZONDA-L H 90-7 C 2,1 V AC 12D	387,7	1955,2	74050	38	1x7	900	440	1960	5,81	211,3	1344	2x76	2x64
ZONDA-L H 90-8 A 2,1 V AC 12D	432,4	1117,3	92700	38	1x8	900	440	2240	6,64	124,3	1169	2x76	2x64
ZONDA-L H 90-8 B 2,1 V AC 12D	452,3	1675,9	88550	38	1x8	900	440	2240	6,64	189,2	1350	2x76	2x64
ZONDA-L H 90-8 C 2,1 V AC 12D	442,6	2234,5	84600	38	1x8	900	440	2240	6,64	247,2	1530	2x76	2x64

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

ZONDA H 100

V-type single-row condenser



Ø 1000 mm

FAN SIZE

75 ÷ 980 kW

DT 15K CAPACITY

1 ÷ 8


NUMBER OF FANS



ZONDA H 100-1



ZONDA H 100-2



ZONDA H 100-3



ZONDA H 100-4



ZONDA H 100-5



ZONDA H 100-6








ZONDA H 100-7



ZONDA H 100-8

DIMENSIONS

ZONDA H 100-1/2/3/4/5/6/7/8

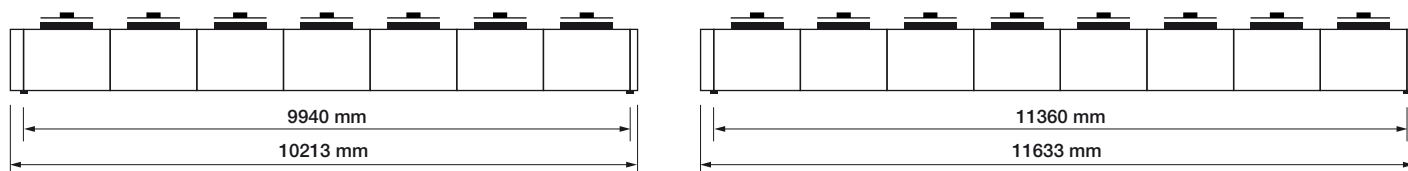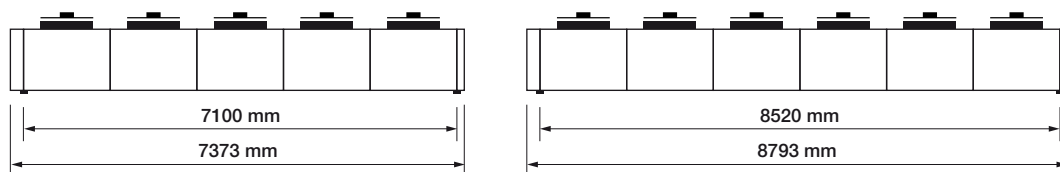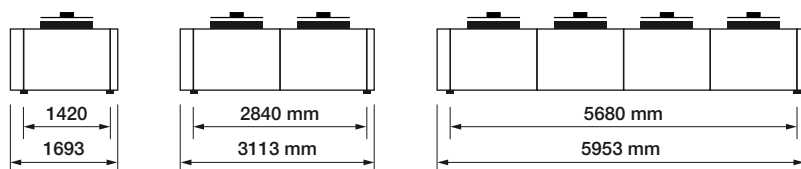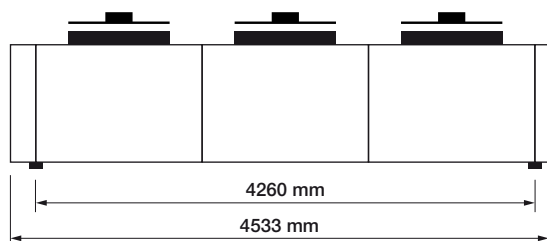

ZONDA H 100

V-type single-row condenser



3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA H 100-1 A 2,1 V AC 06D	93,5	119	29200	53	1x1	1000	930	2480	5,63	14,1	168	2x28	2x22
ZONDA H 100-1 B 2,1 V AC 06D	113,8	178,3	27450	53	1x1	1000	930	2480	5,63	20,1	188	2x35	2x28
ZONDA H 100-1 C 2,1 V AC 06D	122,2	238	25900	53	1x1	1000	930	2480	5,63	26,1	207	2x35	2x28
ZONDA H 100-2 A 2,1 V AC 06D	187,7	238	58400	56	1x2	1000	930	4960	11,26	26,7	304	2x35	2x28
ZONDA H 100-2 B 2,1 V AC 06D	228,1	356,6	54900	56	1x2	1000	930	4960	11,26	39,7	342	2x42	2x35
ZONDA H 100-2 C 2,1 V AC 06D	245	476	51800	56	1x2	1000	930	4960	11,26	53,9	381	2x54	2x42
ZONDA H 100-3 A 2,1 V AC 06D	274,6	357	87600	58	1x3	1000	930	7440	16,89	39,7	441	2x35	2x28
ZONDA H 100-3 B 2,1 V AC 06D	331,8	534,9	82350	58	1x3	1000	930	7440	16,89	57,7	498	2x54	2x42
ZONDA H 100-3 C 2,1 V AC 06D	356,5	713,9	77750	58	1x3	1000	930	7440	16,89	78,9	556	2x54	2x42
ZONDA H 100-4 A 2,1 V AC 06D	376,1	476	116800	59	1x4	1000	930	9920	22,52	53,9	576	2x54	2x42
ZONDA H 100-4 B 2,1 V AC 06D	457,7	713,9	109850	59	1x4	1000	930	9920	22,52	78,9	653	2x64	2x54
ZONDA H 100-4 C 2,1 V AC 06D	490,4	951,9	103650	59	1x4	1000	930	9920	22,52	105,8	730	2x64	2x54
ZONDA H 100-5 A 2,1 V AC 06D	468,1	594,9	146000	60	1x5	1000	930	12400	28,15	66,9	713	2x54	2x42
ZONDA H 100-5 B 2,1 V AC 06D	566,7	892,4	137300	60	1x5	1000	930	12400	28,15	97,9	809	2x64	2x54
ZONDA H 100-5 C 2,1 V AC 06D	605,8	1189,9	129550	60	1x5	1000	930	12400	28,15	130,8	905	2x76	2x64
ZONDA H 100-6 A 2,1 V AC 06D	550,8	713,9	175200	60	1x6	1000	930	14880	33,78	78,9	848	2x54	2x42
ZONDA H 100-6 B 2,1 V AC 06D	667,1	1070,9	164750	60	1x6	1000	930	14880	33,78	115,9	964	2x76	2x64
ZONDA H 100-6 C 2,1 V AC 06D	714,2	1427,9	155450	60	1x6	1000	930	14880	33,78	154,8	1079	2x76	2x64
ZONDA H 100-7 A 2,1 V AC 06D	654,8	832,9	204400	61	1x7	1000	930	17360	39,41	92,8	984	2x64	2x54
ZONDA H 100-7 B 2,1 V AC 06D	801,6	1249,4	192200	61	1x7	1000	930	17360	39,41	139,1	1119	2x76	2x64
ZONDA H 100-7 C 2,1 V AC 06D	861,6	1665,8	181350	61	1x7	1000	930	17360	39,41	185,2	1253	2x76	2x76
ZONDA H 100-8 A 2,1 V AC 06D	752,9	951,9	233600	61	1x8	1000	930	19840	45,04	105,8	1120	2x64	2x54
ZONDA H 100-8 B 2,1 V AC 06D	916	1427,9	219650	61	1x8	1000	930	19840	45,04	157,1	1273	2x76	2x64
ZONDA H 100-8 C 2,1 V AC 06D	981,4	1903,8	207300	61	1x8	1000	930	19840	45,04	210,2	1427	2x76	2x76

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FANS DIAMETER	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	mm	Rpm	W	A	lt	kg	mm	mm
ZONDA H 100-1 A 2,1 V AC 08D	75	119	19050	46	1x1	1000	670	960	2,28	14,1	168	2x28	2x22
ZONDA H 100-1 B 2,1 V AC 08D	84,3	178,3	17900	46	1x1	1000	670	960	2,28	20,1	188	2x35	2x28
ZONDA H 100-1 C 2,1 V AC 08D	85,6	238	16950	46	1x1	1000	670	960	2,28	26,1	207	2x35	2x28
ZONDA H 100-2 A 2,1 V AC 08D	150,4	238	38150	49	1x2	1000	670	1920	4,56	26,7	304	2x35	2x28
ZONDA H 100-2 B 2,1 V AC 08D	168,9	356,6	35850	49	1x2	1000	670	1920	4,56	39,7	342	2x42	2x35
ZONDA H 100-2 C 2,1 V AC 08D	171,4	476	33900	49	1x2	1000	670	1920	4,56	53,9	381	2x54	2x42
ZONDA H 100-3 A 2,1 V AC 08D	222,1	357	57200	51	1x3	1000	670	2880	6,84	39,7	441	2x35	2x28
ZONDA H 100-3 B 2,1 V AC 08D	248	534,9	53750	51	1x3	1000	670	2880	6,84	57,7	498	2x54	2x42
ZONDA H 100-3 C 2,1 V AC 08D	251,9	713,9	50800	51	1x3	1000	670	2880	6,84	78,9	556	2x54	2x42
ZONDA H 100-4 A 2,1 V AC 08D	301,1	476	76250	52	1x4	1000	670	3840	9,12	53,9	576	2x54	2x42
ZONDA H 100-4 B 2,1 V AC 08D	338,5	713,9	71700	52	1x4	1000	670	3840	9,12	78,9	653	2x64	2x54
ZONDA H 100-4 C 2,1 V AC 08D	343,1	951,9	67750	52	1x4	1000	670	3840	9,12	105,8	730	2x64	2x54
ZONDA H 100-5 A 2,1 V AC 08D	376,1	594,9	95300	53	1x5	1000	670	4800	11,4	66,9	713	2x54	2x42
ZONDA H 100-5 B 2,1 V AC 08D	420,4	892,4	89600	53	1x5	1000	670	4800	11,4	97,9	809	2x64	2x54
ZONDA H 100-5 C 2,1 V AC 08D	425,3	1189,9	84700	53	1x5	1000	670	4800	11,4	130,8	905	2x76	2x64
ZONDA H 100-6 A 2,1 V AC 08D	445,2	713,9	114400	53	1x6	1000	670	5760	13,68	78,9	848	2x54	2x42
ZONDA H 100-6 B 2,1 V AC 08D	497,8	1070,9	107550	53	1x6	1000	670	5760	13,68	115,9	964	2x76	2x64
ZONDA H 100-6 C 2,1 V AC 08D	504,3	1427,9	101600	53	1x6	1000	670	5760	13,68	154,8	1079	2x76	2x64
ZONDA H 100-7 A 2,1 V AC 08D	524	832,9	133450	54	1x7	1000	670	6720	15,96	92,8	984	2x64	2x54
ZONDA H 100-7 B 2,1 V AC 08D	592,5	1249,4	125450	54	1x7	1000	670	6720	15,96	139,1	1119	2x76	2x64
ZONDA H 100-7 C 2,1 V AC 08D	602,1	1665,8	118550	54	1x7	1000	670	6720	15,96	185,2	1253	2x76	2x76
ZONDA H 100-8 A 2,1 V AC 08D	602,7	951,9	152500	54	1x8	1000	670	7680	18,24	105,8	1120	2x64	2x54
ZONDA H 100-8 B 2,1 V AC 08D	677,3	1427,9	143400	54	1x8	1000	670	7680	18,24	157,1	1273	2x76	2x64
ZONDA H 100-8 C 2,1 V AC 08D	686,4	1903,8	135500	54	1x8	1000	670	7680	18,24	210,2	1427	2x76	2x76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C



ZONDA-S H 63
ZONDA-S H 80
ZONDA-L H 80
ZONDA H 90
ZONDA-L H 90
ZONDA H 100



**Great products
for great customers**

Stefani Spa | Castegnero (VI) Italy | T. +39 0444 639999
info@stefani-online.it | stefaniexchangers.com